



## SPECIFICATIONS



### PRODUCT DESCRIPTION

Illuminate your message with the Lux Light Wall! Lux ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lux shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

<b>DISPLAY DIMENSION</b>	117.75" W x 117.75" H x 14.5" D
--------------------------	---------------------------------

### GRAPHIC DIMENSIONS

<b>MAIN GRAPHIC</b>	118.5" W x 118.5" H
---------------------	---------------------

<b>END CAP GRAPHIC</b>	14.25" W x 118.5" H
------------------------	---------------------

### GRAPHIC MATERIAL

UV Backlit Fabric

### GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

### DISPLAY CONSTRUCTION

Aluminum Frame

### LADDER LIGHTS FEATURES

<b>EACH LIGHT BEAD</b>	1.0W
------------------------	------

<b>ANGLE</b>	170°
--------------	------

<b>OPERATING VOLTAGE</b>	DC12V/24V
--------------------------	-----------

<b>TOTAL WATTAGE</b>	560W
----------------------	------

<b>TOTAL AMPERAGE</b>	24A
-----------------------	-----

### TRANSFORMER SPECIFICATION

<b>OUTPUT</b>	24V/3.75A
---------------	-----------

<b>INPUT</b>	AC100-240V/1.3A
--------------	-----------------

### SHIPPING WEIGHTS & DIMENSIONS

Lumiere Ladder Lights - 4 Units

Shipping Weight	36 lbs
-----------------	--------

Shipping Dimensions	14" L x 12.5" W x 32.5" H
---------------------	---------------------------

Lumiere Light Wall

Shipping Weight	41 lbs (frame only) 44 lbs (with graphics)
-----------------	---

Shipping Dimensions	34" L x 14" W x 13" H
---------------------	-----------------------

### LARGE QUANTITY FREIGHT

Lumiere Ladder Lights

Freight Shipping	40 boxes per 48" L x 40" W x 48" H skids
------------------	--

Freight Weight	432 lbs
----------------	---------

Lumiere Light Wall

Freight Shipping	15 boxes per 48" L x 40" W x 58" H skids
------------------	--

Freight Weight	492 lbs (frame only) 528 lbs (with graphics)
----------------	---


### GRAPHIC TURN AROUND TIME

2 business days after proof approval

<b>AVAILABILITY</b>	CA and PA
---------------------	-----------



Graphic Endcaps (Optional)

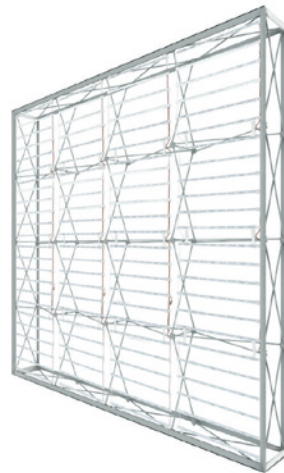

Frame



Channel Bars on Frame



Ladder Lights



## PART LIST



Qty 1 - Pop Up Frame



Qty 8 - 4 Section Channel Bars




Qty 4 - End Cap Channel Bars



Qty 1 - Carry Bag



Qty 2 - Channel Bar Bags

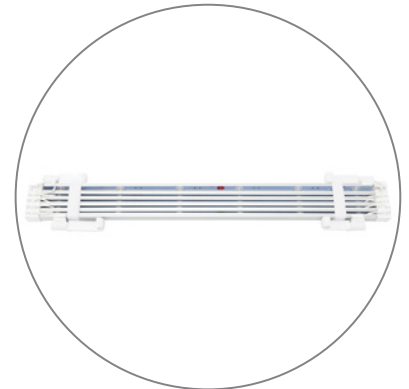

Qty 16 - Ladder Lights



Qty 4 - Transformers



Qty 4 - Transformer Power Cords



Qty 4 - Ladder Light  
Travel Bags



## AVAILABLE ACCESSORIES



La Caja Case



Genie Counter Case



Stabilization Feet



Straight Connector



L Link Connector



Internal Showcase




Lumiere Jumper Cable\*

## SET UP INSTRUCTIONS 1/2


### Set Up Pop Up Frame



**a.** Place frame with the adjustable feet facing down.




**b.** Expand the frame.

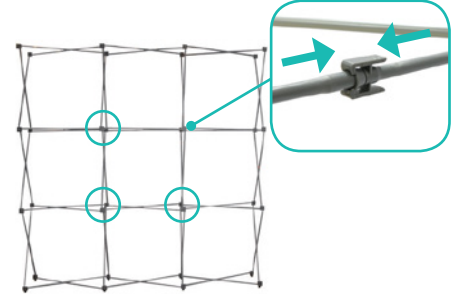


**c.** Close frame by pushing the outside of the frame until male and female ends connect.


### Insert Channel Bars



**a.** Expand each channel bar. Follow bungee to connect.



**b.** Attach channel bars to frame.



**c.** Slide channels bars onto frame, from top to bottom, then secure onto metal peg.




**d.** Attach the top and bottom end-caps on each side of the frame.

### Unfold The Hooks



**a.** Locate each hook.

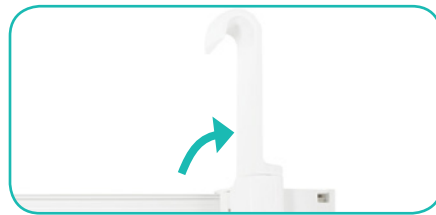

**b.** Turn each hook outward.



**c.** Twist each hook to face the front of the ladder light.





## SET UP INSTRUCTIONS 2/2

### Hook Ladder Lights



**a.** Hang ladder lights from top "x" bar. **Note:** Make sure to follow label that says "UP" or "DOWN".



**b.** Hang ladder lights in each section of the frame until reaching the bottom of the frame.

### Connect Ladder Lights



**a.** Connect each ladder light together using the barrel connectors.



**b.** Connect bottom set of lights to the LED Driver using the barrel connectors



**c.** Insert power cord to the LED Driver. Plug other side into your main power outlet.

### Install Graphic



**a.** In each corner, insert the silicone edge beading into the groove.



**b.** Then insert the remainder of the beading. Repeat blackout installation for the back frame.



**c.** Then repeat graphic installation on the end caps for each side.